


## 12oz Polyester cotton Ripstop (PCRS)

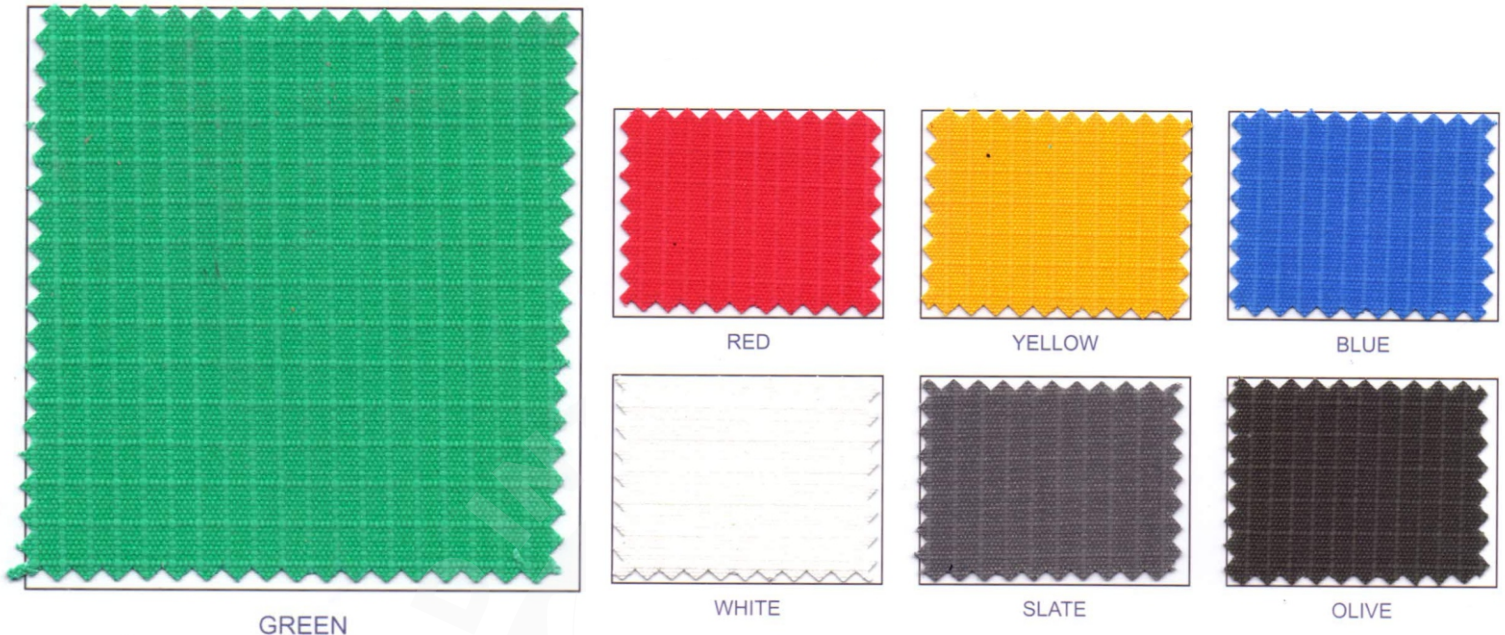

|                                                                    |       |             |                                                                                                                                                                                                                                                                                                                                                                                                                      |
|--------------------------------------------------------------------|-------|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Finished Weight                                                    |       | 470gsm      | <ul style="list-style-type: none"><li>• FABRIC: Polyester /Cotton blended</li><li>• <b>Waterproof</b></li><li>• mildew resistant</li><li>• Acrylic coated</li><li>• UV treated</li><li>• Pigmented for color fastness</li><li>• Breathable &amp; low shrinkage</li><li>• Ultrasonic cut selvage</li><li>• Smooth &amp; flexible finish</li></ul> <p>USED FOR: Tent walls, light weight covers, canopies, awnings</p> |
| Width                                                              |       | Up to 240cm |                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Blend-Polyester/Cotton                                             |       | 52/48       |                                                                                                                                                                                                                                                                                                                                                                                                                      |
|                                                                    | Wrap  | Weft        |                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Tensile Strength<br>(5 X 20 cm strip)<br>As per 2001.2.13 standard | 2100N | 1700N       |                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Tear Strength<br>(Tongue Tear)<br>As per 2001.2.10                 | 120N  | 80N         |                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Shrinkage                                                          | <2%   | NIL         |                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Water Resistance</b>                                            |       |             |                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Hydrostatic water head                                             |       | 55cm        |                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Cone Test (18 hours)                                               |       | No leakage  |                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Light fastness (1-8 scale)                                         |       | 5/6         |                                                                                                                                                                                                                                                                                                                                                                                                                      |